



---

## Design Example Report

|                        |   |
|------------------------|---|
| <b>Title</b>           | <b>3.9W Power Supply using TNY263P</b>                                  |
| <b>Specification</b>   | Input: 85 – 275V <sub>AC</sub><br>Output: 12V/175mA, 9V/110mA, 5V/160mA |
| <b>Application</b>     | Refrigerator  |
| <b>Author</b>          | Power Integrations Applications Department                              |
| <b>Document Number</b> | DER-52  |
| <b>Date</b>            | April 20, 2005  |
| <b>Revision</b>        | 1.0   |

### Summary and Features

This document is an engineering prototype report describing a Refrigerator power supply utilizing a *TinySwitch-II* TNY263.

- No Y-Cap
- No X-Cap
- No Common-Mode Choke
- Low Component Count
- Good Cross Regulation
- No Load Input Power <400mW

The products and applications illustrated herein (including circuits external to the products and transformer construction) may be covered by one or more U.S. and foreign patents or potentially by pending U.S. and foreign patent applications assigned to Power Integrations. A complete list of Power Integrations' patents may be found at [www.powerint.com](http://www.powerint.com).

## Table Of Contents

|        |   |    |
|--------|---|----|
| 1      | Introduction.....                                     | 3  |
| 2      | Power Supply Specification.....                       | 4  |
| 3      | Schematic.....  | 5  |
| 4      | Circuit Description .....                             | 6  |
| 4.1    | TinySwitch-II Primary .....                           | 6  |
| 4.2    | Output Rectification.....                             | 6  |
| 4.3    | Output Feedback.....                                  | 6  |
| 5      | PCB Layout .....                                      | 7  |
| 7      | Transformer Specification.....                        | 9  |
| 7.1    | Electrical Diagram .....                              | 9  |
| 7.2    | Electrical Specifications.....                        | 9  |
| 7.3    | Materials.....  | 9  |
| 7.4    | Transformer Build Diagram .....                       | 10 |
| 7.5    | Transformer Construction.....                         | 10 |
| 8      | Transformer Spreadsheets.....                         | 11 |
| 9      | Performance Data .....                                | 13 |
| 9.1    | Efficiency.....                                       | 13 |
| 9.2    | No-load Input Power.....                              | 13 |
| 9.3    | Regulation .....                                      | 14 |
| 9.3.1  | Load.....   | 14 |
| 9.3.2  | Line .....  | 14 |
| 9.3.3  | Cross Regulation.....                                 | 15 |
| 10     | Thermal Performance .....                             | 16 |
| 11     | Waveforms.....  | 17 |
| 11.1   | Drain Voltage and Current, Normal Operation .....     | 17 |
| 11.2   | Output Voltage Start-up Profile .....                 | 17 |
| 11.3   | Drain Voltage and Current Start-up Profile.....       | 18 |
| 11.4   | Load Transient Response (75% to 100% Load Step) ..... | 19 |
| 11.5   | Output Ripple Measurements.....                       | 21 |
| 11.5.1 | Ripple Measurement Technique .....                    | 21 |
| 11.5.2 | Measurement Results .....                             | 22 |
| 12     | Conducted EMI .....                                   | 23 |
| 13     | Revision History.....                                 | 25 |

### Important Note:

Although this board is designed to satisfy safety isolation requirements, the engineering prototype has not been agency approved. Therefore, all testing should be performed using an isolation transformer to provide the AC input to the prototype board.

Design Reports contain a power supply design specification, schematic, bill of materials, and transformer documentation. Performance data and typical operation characteristics are included. Typically only a single prototype has been built.



## 1 Introduction

This document is an engineering prototype report describing a Refrigerator power supply utilizing a *TinySwitch-II* TNY263. This power supply is intended as a general purpose evaluation platform for *TinySwitch-II*.

The document contains the power supply specification, schematic, bill of materials, transformer documentation, printed circuit layout, and performance data.



Figure 1 – Populated Circuit Board Photograph.

## 2 Power Supply Specification

| Description                   | Symbol          | Min                                      | Typ | Max | Units        | Comment  |  |
|-------------------------------|-----------------|--|-----|-----|--------------|--|--|
| <b>Input</b>                  |                 |  |     |     |              |  |  |
| Voltage                       | $V_{IN}$        | 85                                       |     | 265 | VAC          | 2 Wire – no P.E.   |  |
| Frequency                     | $f_{LINE}$      |  | 50  |     | Hz           |  |  |
| No-load Input Power (230 VAC) |                 |  |     |     | W            |  |  |
| <b>Output</b>                 |                 |  |     |     |              |  |  |
| Output Voltage 1              | $V_{OUT1}$      |  | 5   |     | V            | ± 5%<br>20 MHz Bandwidth   |  |
| Output Ripple Voltage 1       | $V_{RIPPLE1}$   |  | 5   |     | mV           |  |  |
| Output Current 1              | $I_{OUT1}$      |  | 160 |     | mA           |  |  |
| Output Voltage 1              | $V_{OUT1}$      |  | 9   |     | V            | ± 7%<br>20 MHz Bandwidth   |  |
| Output Ripple Voltage 1       | $V_{RIPPLE1}$   |  |     |     | mV           |  |  |
| Output Current 1              | $I_{OUT1}$      |  | 110 |     | mA           |  |  |
| Output Voltage 1              | $V_{OUT1}$      |  | 12  |     | V            | ± 10%<br>20 MHz Bandwidth  |  |
| Output Ripple Voltage 1       | $V_{RIPPLE1}$   |  |     |     | mV           |  |  |
| Output Current 1              | $I_{OUT1}$      |  | 175 |     | mA           |  |  |
| <b>Total Output Power</b>     |                 |  |     |     |              |  |  |
| Continuous Output Power       | $P_{OUT}$       |  |     | 3.9 | W            |  |  |
| Peak Output Power             | $P_{OUT\_PEAK}$ |  |     | 3.9 | W            |  |  |
| <b>Efficiency</b> estimated   | $\eta$          | 72                                       |     | 77  | %            |  |  |
| <b>Environmental</b>          |                 |  |     |     |              |  |  |
| Conducted EMI                 |                 | Meets CISPR22B / EN55022B                |     |     |              |  |  |
| Safety                        |                 | Designed to meet IEC950, UL1950 Class II |     |     |              |  |  |
| Surge                         |                 | 4  |     |     | kV           | 1.2/50 $\mu$ s surge, IEC 1000-4-5, Series Impedance:<br>Differential Mode: 2 $\Omega$<br>Common Mode: 12 $\Omega$ |  |
| Surge                         |                 | 3  |     |     | kV           | 100 kHz ring wave, 500 A short circuit current, differential and common mode                                       |  |
| Ambient Temperature           | $T_{AMB}$       | 0  |     | 50  | $^{\circ}$ C | Adapter Enclosure  |  |



### 3 Schematic

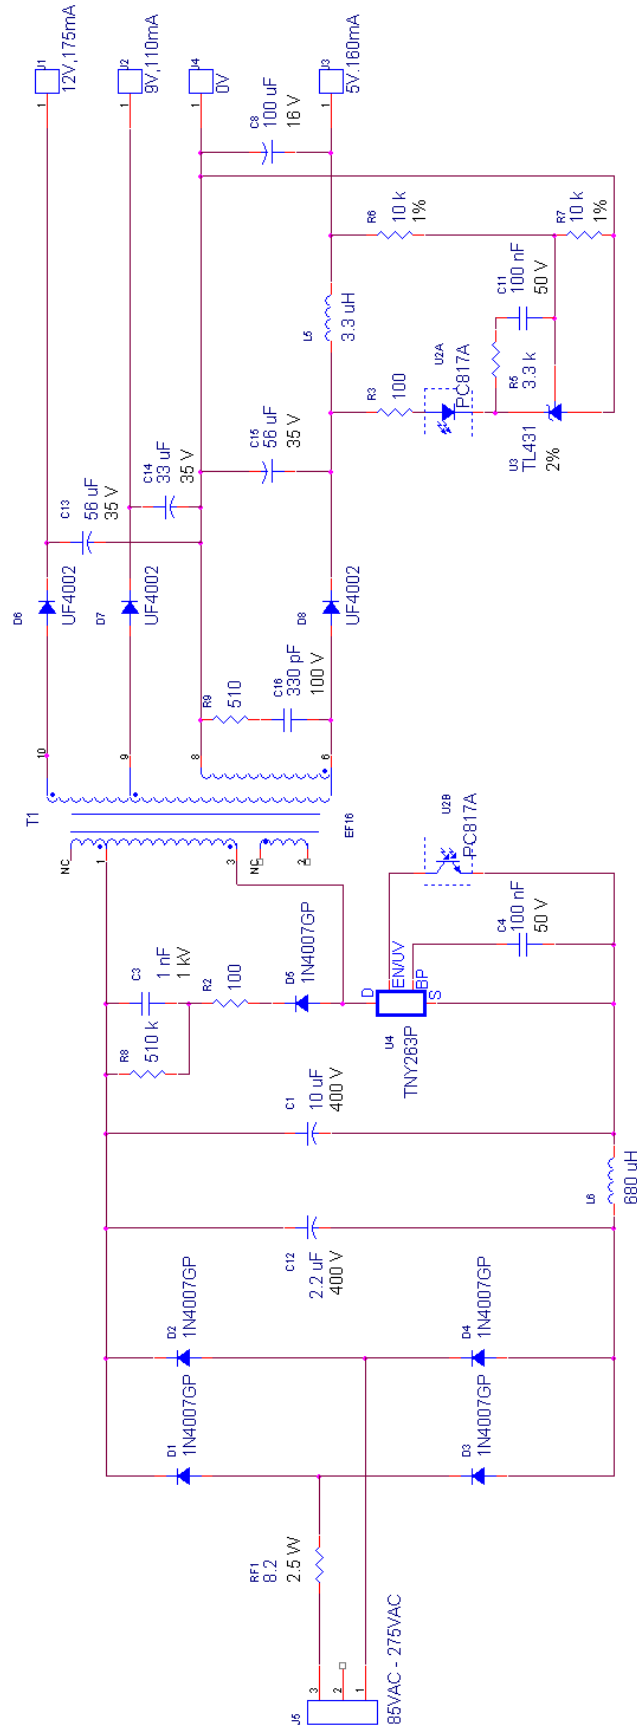


Figure 2 – Schematic.



## 4 Circuit Description

The schematic in Figure 2 shows an off-line flyback converter using the TNY263P. The circuit is designed to operate from 85 VAC to 265 VAC input and provides multiple outputs (i.e. +5V, +9V, +12V).

### 4.1 *TinySwitch-II Primary*

AC input power is rectified by a full bridge diodes, consisting of D1 through D4. The rectified DC is then filtered by the bulk storage capacitors C12 and C1. Inductor L6, C1 and C12 form a pi ( $\pi$ ) filter, which attenuates conducted differential-mode EMI noise.

The rectified DC rail is applied to one end of the transformer primary, the other end being connected to the drain pin of the integrated MOSFET of U4.

To keep the peak DRAIN voltage acceptably below the  $BV_{DSS}$  (700V) of U4, diode D5, C3, R8, and R2 form a primary clamp. This network clamps the voltage spike seen on the DRAIN due to primary and secondary reflected leakage inductance.

Capacitor C4 stores energy through the internal high voltage device and provides bias supply for U4.

### 4.2 *Output Rectification*

The secondary has three isolated windings. Each output is rectified and filtered to provide +5V, +9V & +12V DC outputs. The +5V output has a post filter to reduce the high frequency output voltage ripple.

### 4.3 *Output Feedback*

The regulation is realized with a TL431 shunt regulator to keep the 5V output tolerance within the specification.

For a relaxed 5V tolerance the TL431 regulation circuit could be replaced with a Zener diode regulation.



## 5 PCB Layout

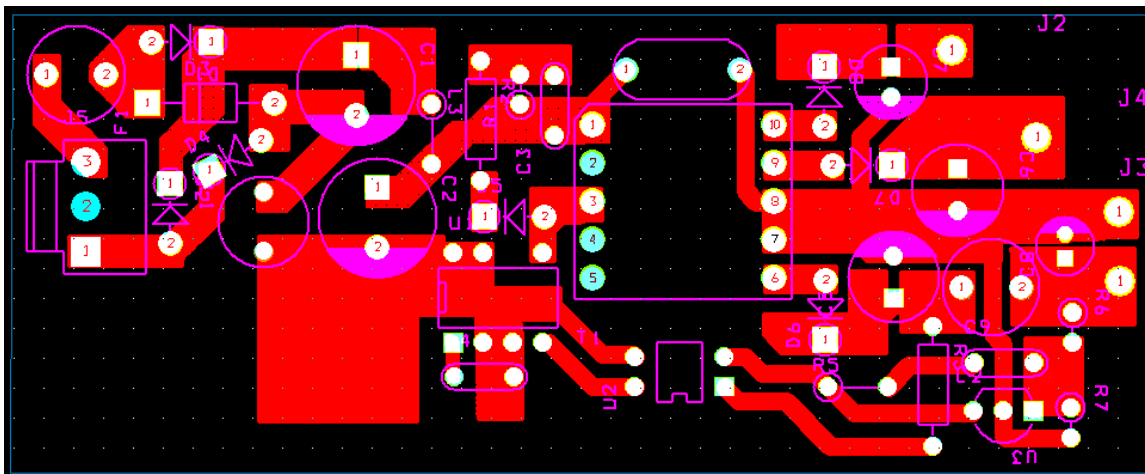


Figure 3 – Printed Circuit Layout.

**Notes:**

Parts which are not used in the prototype:

L3, C10 (Y-Cap)

Parts which are different to the layout:

C1, L1, F1

Parts which are not included in the layout:

R9, C16

A fully updated layout file is available upon request.



## 6 Bill Of Materials

| Item | Qty | Value    | Description  | Part Reference | Mfg                     |
|------|-----|----------|--|----------------|-------------------------|
| 1    | 1   | 10 uF    | 10uF,400V, Electrolytic, Gen. Purpose                      | C1             | United Chemi-Con        |
| 2    | 1   | 1 nF     | 1 nF, 1 kV, Disc Ceramic                                   | C3             | NIC Components Corp     |
| 3    | 2   | 100 nF   | 100 nF, 50 V, Ceramic, X7R                                 | C4 C11         | Panasonic               |
| 4    | 1   | 100 uF   | 100 uF, 16 V, Electrolytic, Gen. Purpose, (5 x 11)         | C8             | United Chemi-Con        |
| 5    | 1   | 2.2 uF   | 2.2 uF, 400 V, Electrolytic, (8 x 11.5)                    | C12            | United Chemi-Con        |
| 6    | 2   | 56 uF    | 56 uF, 35 V, Electrolytic, Low ESR, 250 mOhm, (6.3 x 11.5) | C13 C15        | United Chemi-Con        |
| 7    | 1   | 33 uF    | 33 uF, 35 V, Electrolytic, Low ESR, 50 mOhm, (5 x 11.5)    | C14            | United Chemi-Con        |
| 8    | 1   | 330 pF   | 330 pF, 100 V, Ceramic, COG                                | C16            | Panasonic               |
| 9    | 5   | 1N4007GP | 1000 V, 1 A, Rectifier, Glass Passivated, 2 us, DO-41      | D1 D2 D3 D4 D5 | Vishay                  |
| 10   | 3   | UF4002   | 100 V, 1 A, Ultrafast Recovery, 50 ns, DO-41               | D6 D7 D8       | Vishay                  |
| 11   | 1   | 3.3 uH   | 3.3 uH, 0.285 A, Iron Core                                 | L5             | API Delevan             |
| 12   | 1   | 680 uH   | 680 uH, 0.113 A,   | L6             | Wuerth Elektronik       |
| 13   | 2   | 100      | 100 R, 5%, 1/4 W, Carbon Film                              | R2 R3          | Yageo                   |
| 14   | 1   | 3.3 k    | 3.3 k, 5%, 1/4 W, Carbon Film                              | R5             | Yageo                   |
| 15   | 2   | 10 k     | 10 k, 1%, 1/4 W, Metal Film                                | R6 R7          | Yageo                   |
| 16   | 1   | 510 k    | 510 k, 5%, 1/4 W, Carbon Film                              | R8             | Yageo                   |
| 17   | 1   | 510      | 510 R, 5%, 1/4 W, Carbon Film                              | R9             | Yageo                   |
| 18   | 1   | 8.2      | 8.2 R, 2.5 W, Fusible/Flame Proof Wire Wound               | RF1            | Vitrohm                 |
| 19   | 1   | EF16     | Bobbin, EF16, Horizontal, 10 pins                          | T1             | Ngai Cheong Electronics |
| 20   | 1   | PC817A   | Opto coupler, 35 V, CTR 80-160%, 4-DIP                     | U2             | Isocom, Sharp           |
| 21   | 1   | TL431    | 2.495 V Shunt Regulator IC, 2%, 0 to 70C, TO-92            | U3             | Texas Instruments       |
| 22   | 1   | TNY263P  | TinySwitch-II, TNY263P, DIP-8B                             | U4             | Power Integrations      |





## 7 Transformer Specification

### 7.1 Electrical Diagram

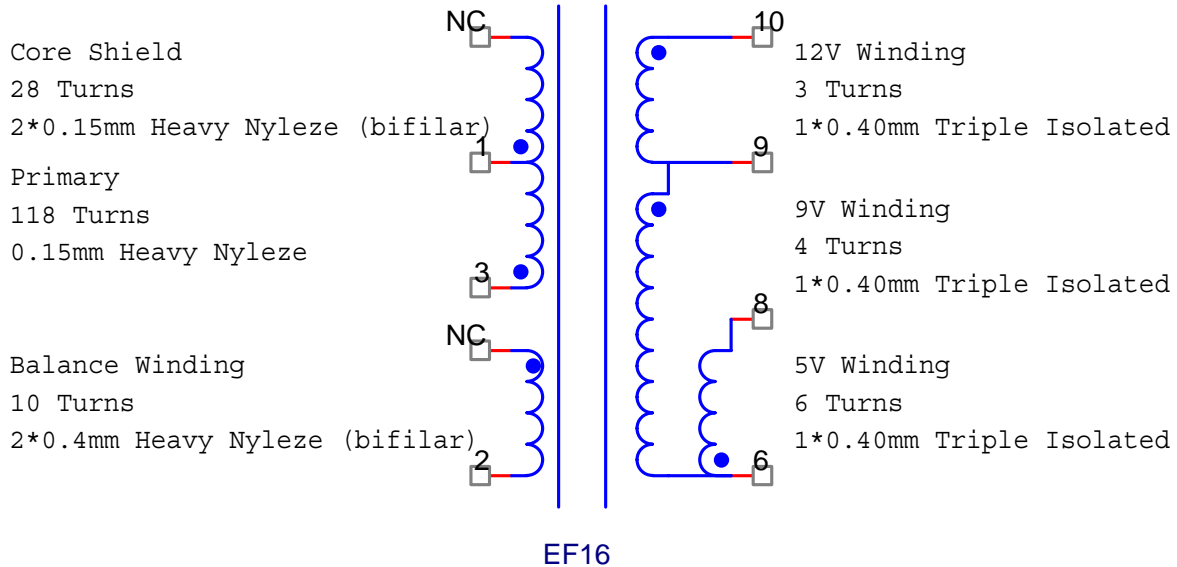


Figure 4 –Transformer Electrical Diagram


### 7.2 Electrical Specifications

|                                   |  |                       |
|-----------------------------------|--|-----------------------|
| <b>Electrical Strength</b>        | 1 second, 60 Hz, from Pins 1-3 to Pins 8-10                      | 3000 VAC              |
| <b>Primary Inductance</b>         | Pins 1-3, all other windings open, measured at 100 kHz, 0.4 VRMS | 1990 $\mu$ H, -0/+20% |
| <b>Resonant Frequency</b>         | Pins 1-3, all other windings open                                | 950 kHz (Min.)        |
| <b>Primary Leakage Inductance</b> | Pins 1-3, with Pins 8-10 shorted, measured at 100 kHz, 0.4 VRMS  | 50 $\mu$ H (Max.)     |

### 7.3 Materials

| Item | Description  |
|------|--|
| [1]  | Core: PC40EF16-Z, TDK or equivalent Gapped for AL of 143 nH/T <sup>2</sup> |
| [2]  | Bobbin: EF16 Horizontal 10 pin   |
| [3]  | Magnet Wire: 0.15mm  |
| [4]  | Magnet Wire: 0.4mm   |
| [5]  | Triple Insulated Wire: 0.4mm   |
| [6]  | Tape: 3M 1298 Polyester Film, 2.0 mils thick, 9.8 mm wide                  |
| [7]  | Varnish  |

**7.4 Transformer Build Diagram**

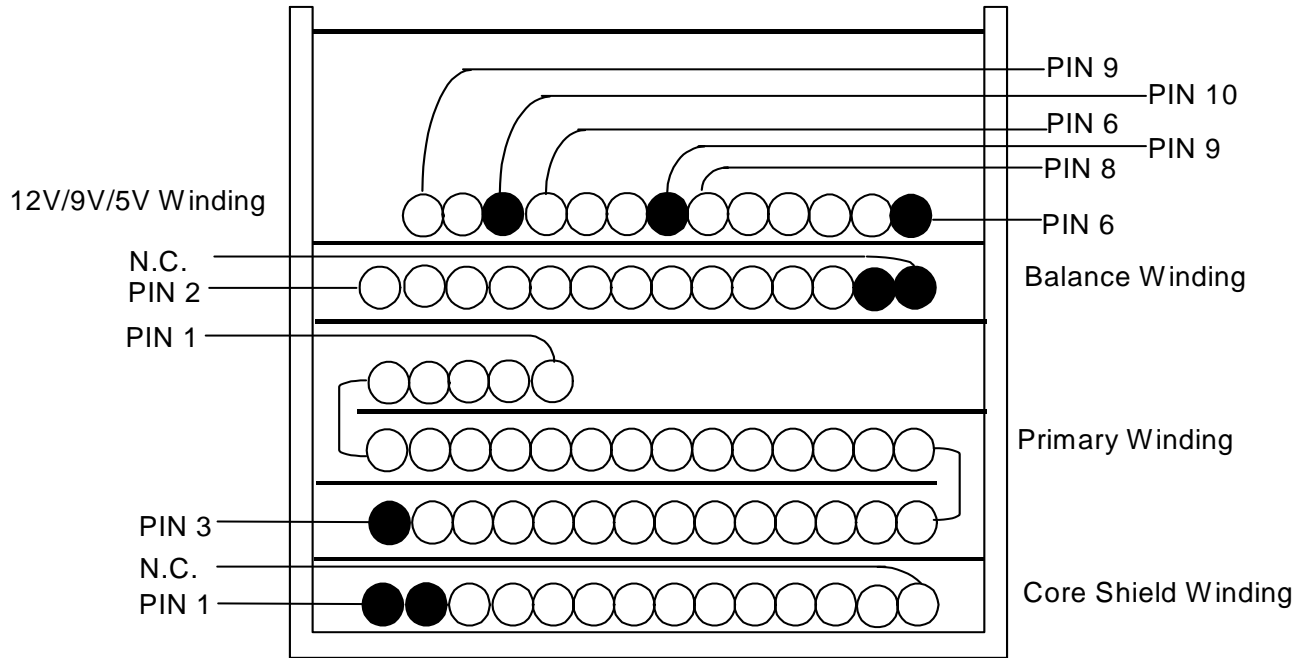

**Figure 5 – Transformer Build Diagram.**

**7.5 Transformer Construction**

|                                |   |
|--------------------------------|---|
| <b>Core Shield</b>             | Start at PIN1. Wind 28 bifilar turns of item [3] from left to right covering a single full layer. Leave the end of winding inside.  |
| <b>Tape</b>                    | 1 layer of item [6] for mechanical fixing.  |
| <b>Primary</b>                 | Start at Pin 3. Wind 118 turns of item [3] in approximately 2 1/2 layers from left to right. The first layer should have about 53 turns, the second 53 turns too and the third 10 turns. Bring finish lead back to start. Finish on Pin 1.                        |
| <b>Basic Insulation</b>        | 1 layer of item [6] for basic insulation.   |
| <b>Balance Winding</b>         | Starting temporary at Pin 6, wind 10 bifilar turns of item [4] from right to the left. Spread turns evenly across bobbin. Finish at Pin 2. Remove the wire from Pin 6 and leave the end of winding inside.  |
| <b>Insulation</b>              | Use 1 layers of item [6] for basic insulation   |
| <b>12V, 9V and 5V Windings</b> | Start at Pin 6. Wind 6 turns of item [5] from right to left. Terminate on Pin 8. In the same layer start at Pin 9. Wind 4 turns of item [5] and terminate on Pin 6. For the 12V Winding start at Pin 10 and wind 3 turns of item [5]. Terminate Winding on Pin 9. |
| <b>Outer Wrap</b>              | Wrap windings with 2 layers of tape item [6].   |
| <b>Final Assembly</b>          | Assemble and secure core halves so that the tape wrapped E core is at the bottom of the transformer. Varnish impregnate (item [9]).   |

## 8 Transformer Spreadsheets

| INPUT  | INFO        | OUTPUT    | UNIT             |   |
|--|-------------|-----------|------------------|---|
| <b>ENTER APPLICATION VARIABLES</b>                   |             |           |                  |   |
| VACMIN   | 85          |           | Volts            | Minimum AC Input Voltage  |
| VACMAX   | 275         |           | Volts            | Maximum AC Input Voltage  |
| fL   | 50          |           | Hertz            | AC Mains Frequency  |
| VO   | 5           |           | Volts            | Output Voltage  |
| PO   | 3.89        |           | Watts            | Output Power  |
| n  | 0.75        |           |                  | Efficiency Estimate   |
| Z  | 0.5         | 0.50      |                  | Loss Allocation Factor  |
| tC   |             | 3.00      | mSeconds         | Bridge Rectifier Conduction Time Estimate                             |
| CIN  | 12.2        |           | uFarads          | Input Filter Capacitor  |
| <b>ENTER TinySwitch-II VARIABLES</b>                 |             |           |                  |   |
| TinySwitch-II  | tny263      |           | Universal        | 115 Doubled/230V  |
| Chosen Device  | TNY263      | Power Out | 4.7W             | 7.5W  |
| ILIMITMIN  |             |           | 0.20 Amps        | TinySwitch-II Minimum Current Limit                                   |
| ILIMITMAX  |             |           | 0.23 Amps        | TinySwitch-II Maximum Current Limit                                   |
| fS   |             |           | 132000.00 Hertz  | TinySwitch-II Switching Frequency                                     |
| fSmin  |             |           | 120000.00 Hertz  | TinySwitch-II Minimum Switching Frequency (inc. jitter)               |
| fSmax  |             |           | 144000.00 Hertz  | TinySwitch-II Maximum Switching Frequency (inc. jitter)               |
| VOR  | 118         |           | Volts            | Reflected Output Voltage  |
| VDS  |             |           | 10.00 Volts      | TinySwitch-II on-state Drain to Source Voltage                        |
| VD   | 1           |           | Volts            | Output Winding Diode Forward Voltage Drop                             |
| KP   |             |           | 1.05             | Ripple to Peak Current Ratio (0.6<KRP<1.0 : 1.0<KDP<6.0)              |
| <b>ENTER TRANSFORMER CORE/CONSTRUCTION VARIABLES</b> |             |           |                  |   |
| Core Type  | ef16        |           |                  |   |
| Core   | EF16        | P/N:      |                  | PC40EF16-Z  |
| Bobbin   | EF16_BOBBIN | P/N:      |                  | 0   |
| AE   |             |           | 0.20 cm^2        | Core Effective Cross Sectional Area                                   |
| LE   |             |           | 3.76 cm          | Core Effective Path Length  |
| AL   |             |           | 1100.00 nH/T^2   | Ungapped Core Effective Inductance                                    |
| BW   |             |           | 10.00 mm         | Bobbin Physical Winding Width   |
| M  | 0           |           | mm               | Safety Margin Width (Half the Primary to Secondary Creepage Distance) |
| L  | 2           |           |                  | Number of Primary Layers  |
| NS   | 6           |           |                  | Number of Secondary Turns   |
| <b>DC INPUT VOLTAGE PARAMETERS</b>                   |             |           |                  |   |
| VMIN   |             |           | 92.19 Volts      | Minimum DC Input Voltage  |
| VMAX   |             |           | 388.91 Volts     | Maximum DC Input Voltage  |
| <b>CURRENT WAVEFORM SHAPE PARAMETERS</b>             |             |           |                  |   |
| DMAX   |             |           | 0.59             | Maximum Duty Cycle  |
| Iavg   |             |           | 0.06 Amps        | Average Primary Current   |
| IP   |             |           | 0.20 Amps        | Minimum Peak Primary Current  |
| IR   |             |           | 0.20 Amps        | Primary Ripple Current  |
| IRMS   |             |           | 0.09 Amps        | Primary RMS Current   |
| <b>TRANSFORMER PRIMARY DESIGN PARAMETERS</b>         |             |           |                  |   |
| LP   |             |           | 1989.19 uHenries | Primary Inductance  |
| NP   |             |           | 118.00           | Primary Winding Number of Turns                                       |
| ALG  |             |           | 142.86 nH/T^2    | Gapped Core Effective Inductance                                      |
| BM   |             |           | 1887.04 Gauss    | Maximum Flux Density, (BP<3100)                                       |
| BAC  |             |           | 943.52 Gauss     | AC Flux Density for Core Loss Curves (0.5 X Peak to Peak)             |
| ur   |             |           | 1637.47          | Relative Permeability of Ungapped Core                                |
| LG   |             |           | 0.15 mm          | Gap Length (Lg > 0.1 mm)  |
| BWE  |             |           | 20.00 mm         | Effective Bobbin Width  |
| OD   |             |           | 0.17 mm          | Maximum Primary Wire Diameter including insulation                    |
| INS  |             |           | 0.04 mm          | Estimated Total Insulation Thickness (= 2 * film thickness)           |
| DIA  |             |           | 0.13 mm          | Bare conductor diameter   |
| AWG  |             |           | 36.00 AWG        | Primary Wire Gauge (Rounded to next smaller standard AWG value)       |
| CM   |             |           | 25.40 Cmils      | Bare conductor effective area in circular mils                        |
| CMA  |             |           | 296.98 Cmils/Amp | Primary Winding Current Capacity (200 < CMA < 500)                    |
| <b>TRANSFORMER SECONDARY DESIGN PARAMETERS</b>       |             |           |                  |   |
| <b>Lumped parameters</b>                             |             |           |                  |   |
| ISP  |             |           | 3.84 Amps        | Peak Secondary Current  |
| ISRMS  |             |           | 1.40 Amps        | Secondary RMS Current   |
| IO   |             |           | 0.78 Amps        | Power Supply Output Current   |
| IRIPPLE  |             |           | 1.17 Amps        | Output Capacitor RMS Ripple Current                                   |
| CMS  |             |           | 280.74 Cmils     | Secondary Bare Conductor minimum circular mils                        |
| AWGS   |             |           | 25.00 AWG        | Secondary Wire Gauge (Rounded up to next larger standard AWG value)   |
| DIAS   |             |           | 0.46 mm          | Secondary Minimum Bare Conductor Diameter                             |
| ODS  |             |           | 1.67 mm          | Secondary Maximum Outside Diameter for Triple Insulated Wire          |
| INSS   |             |           | 0.60 mm          | Maximum Secondary Insulation Wall Thickness                           |
| <b>VOLTAGE STRESS PARAMETERS</b>                     |             |           |                  |   |



|        |              |  |
|--------|--------------|--|
| VDRAIN | 656.71 Volts | Maximum Drain Voltage Estimate (Includes Effect of Leakage Inductance) |
| PIVS   | 24.78 Volts  | Output Rectifier Maximum Peak Inverse Voltage                          |

**TRANSFORMER SECONDARY DESIGN PARAMETERS (MULTIPLE OUTPUTS)**

**1st output**

|          |      |             |  |
|----------|------|-------------|--|
| VO1      | 5    | 5.00 Volts  | Output Voltage (if unused, defaults to single output design) |
| IO1      | 0.16 | 0.16 Amps   | Output DC Current  |
| PO1      |      | 0.80 Watts  | Output Power   |
| VD1      |      | 1.00 Volts  | Output Diode Forward Voltage Drop                            |
| NS1      |      | 6.00        | Output Winding Number of Turns                               |
| ISRMS1   |      | 0.29 Amps   | Output Winding RMS Current                                   |
| IRIPPLE1 |      | 0.24 Amps   | Output Capacitor RMS Ripple Current                          |
| PIVS1    |      | 24.78 Volts | Output Rectifier Maximum Peak Inverse Voltage                |
|          |      |             |  |
| CMS1     |      | 57.74 Cmils | Output Winding Bare Conductor minimum circular mils          |
| AWGS1    |      | 32.00 AWG   | Wire Gauge (Rounded up to next larger standard AWG value)    |
| DIAS1    |      | 0.20 mm     | Minimum Bare Conductor Diameter                              |
| ODS1     |      | 1.67 mm     | Maximum Outside Diameter for Triple Insulated Wire           |

**2nd output**

|          |      |             |   |
|----------|------|-------------|---|
| VO2      | 9    | Volts       | Output Voltage  |
| IO2      | 0.11 | Amps        | Output DC Current   |
| PO2      |      | 0.99 Watts  | Output Power  |
| VD2      | 1    | Volts       | Output Diode Forward Voltage Drop                         |
| NS2      |      | 10.00       | Output Winding Number of Turns                            |
| ISRMS2   |      | 0.20 Amps   | Output Winding RMS Current                                |
| IRIPPLE2 |      | 0.17 Amps   | Output Capacitor RMS Ripple Current                       |
| PIVS2    |      | 41.96 Volts | Output Rectifier Maximum Peak Inverse Voltage             |
|          |      |             |   |
| CMS2     |      | 39.69 Cmils | Output Winding Bare Conductor minimum circular mils       |
| AWGS2    |      | 34.00 AWG   | Wire Gauge (Rounded up to next larger standard AWG value) |
| DIAS2    |      | 0.16 mm     | Minimum Bare Conductor Diameter                           |
| ODS2     |      | 1.00 mm     | Maximum Outside Diameter for Triple Insulated Wire        |

**3rd output**

|          |       |             |   |
|----------|-------|-------------|---|
| VO3      | 12    | Volts       | Output Voltage  |
| IO3      | 0.175 | Amps        | Output DC Current   |
| PO3      |       | 2.10 Watts  | Output Power  |
| VD3      | 1     | Volts       | Output Diode Forward Voltage Drop                         |
| NS3      |       | 13.00       | Output Winding Number of Turns                            |
| ISRMS3   |       | 0.32 Amps   | Output Winding RMS Current                                |
| IRIPPLE3 |       | 0.26 Amps   | Output Capacitor RMS Ripple Current                       |
| PIVS3    |       | 54.85 Volts | Output Rectifier Maximum Peak Inverse Voltage             |
|          |       |             |   |
| CMS3     |       | 63.15 Cmils | Output Winding Bare Conductor minimum circular mils       |
| AWGS3    |       | 32.00 AWG   | Wire Gauge (Rounded up to next larger standard AWG value) |
| DIAS3    |       | 0.20 mm     | Minimum Bare Conductor Diameter                           |
| ODS3     |       | 0.77 mm     | Maximum Outside Diameter for Triple Insulated Wire        |

|                    |  |            |                    |
|--------------------|--|------------|--------------------|
| <b>Total power</b> |  | 3.89 Watts | Total Output Power |
|--------------------|--|------------|--------------------|



## 9 Performance Data

All measurements performed at room temperature, 50 Hz input frequency.

### 9.1 Efficiency

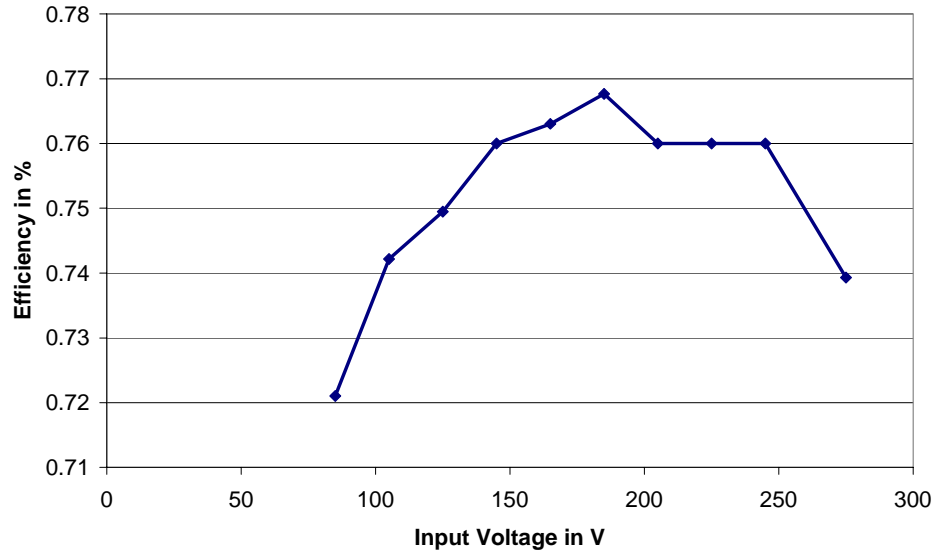


Figure 6- Efficiency vs. Input Voltage, Room Temperature, 50 Hz.

### 9.2 No-load Input Power

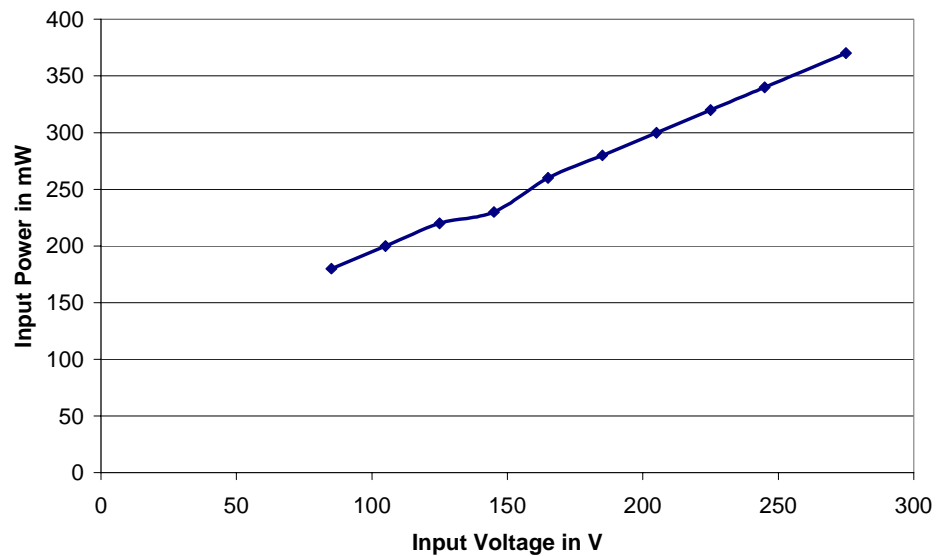


Figure 7- Zero Load Input Power vs. Input Line Voltage, Room Temperature, 50 Hz.



### 9.3 Regulation

#### 9.3.1 Load

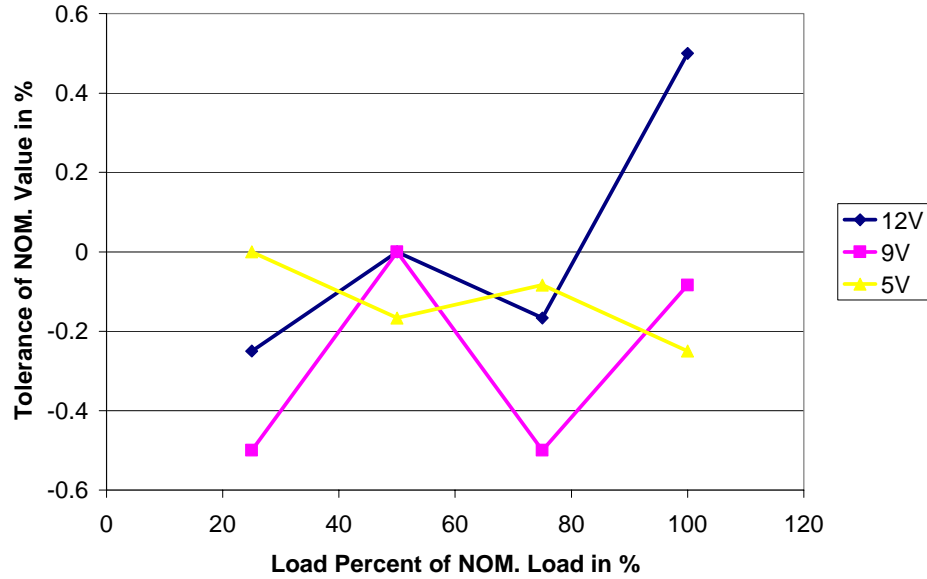


Figure 8 –Load Regulation, Room Temperature.

#### 9.3.2 Line

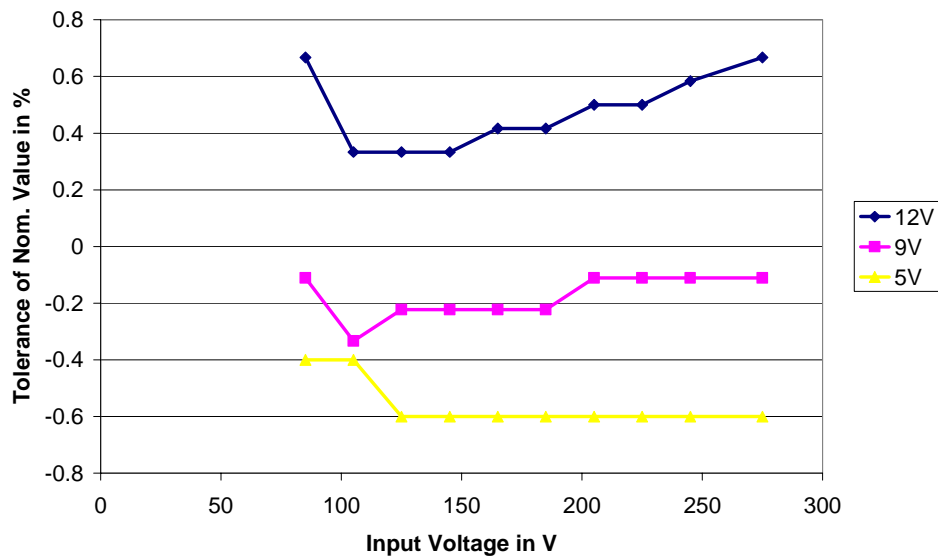


Figure 9 – Line Regulation, Room Temperature, Full Load.



## 9.3.3 Cross Regulation

|                          | <b>12V Rail (A)</b> | <b>9V Rail (A)</b> | <b>5V Rail (A)</b> |
|--------------------------|---------------------|--------------------|--------------------|
| <b>Min Load (X)</b>      | 0.035               | 0.022              | 0.036              |
| <b>Max Load (M)</b>      | 0.175               | 0.11               | 0.16               |
| <b>Load Combinations</b> |                     |                    |                    |
| <b>12V - 9V -5V</b>      | Voltage (V)         | Voltage (V)        | Voltage (V)        |
| XXX                      | 12.16               | 9.08               | 4.99               |
| XXM                      | 13.1                | 9.6                | 4.85               |
| XXM                      | 12.15               | 8.67               | 5                  |
| MXX                      | 11.44               | 8.88               | 5                  |
| XMM                      | 12.9                | 9.03               | 4.93               |
| MMX                      | 11.48               | 8.67               | 5                  |
| MMM                      | 12.06               | 8.99               | 4.97               |
| Min (V)                  | 11.44               | 8.67               | 4.85               |
| Max (V)                  | 13.1                | 9.6                | 5                  |
| <b>% Below</b>           | <b>-4.67</b>        | <b>-3.67</b>       | <b>-3.00</b>       |
| <b>% Above</b>           | <b>9.17</b>         | <b>6.67</b>        | <b>0.00</b>        |



## 10 Thermal Performance


| Temperature (°C)      |        |         |         |
|-----------------------|--------|---------|---------|
| Item                  | 85 VAC | 115 VAC | 230 VAC |
| Ambient               | 25     | 25      | 25      |
| Inductor (L6 )        | 41.5   | 36      | 37      |
| Transformer (T1)      | 48.5   | 46.5    | 46      |
| Clamp Resistor (R8 )  | 44     | 44.5    | 45      |
| Snubber Resistor (R9) | 38     | 37      | 36.5    |
| TNY263P (U4)          | 45.5   | 42      | 44.5    |
| Rectifier 12V (D8)    | 47     | 45.5    | 47.5    |






## 11 Waveforms

### 11.1 Drain Voltage and Current, Normal Operation

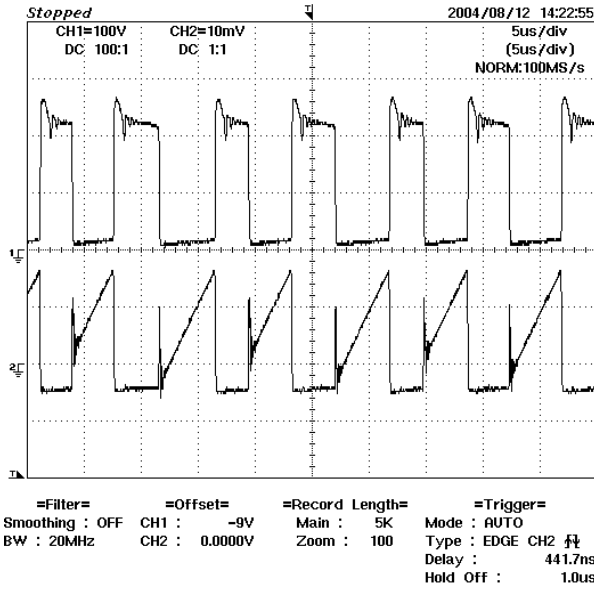


**Figure 10 - 85 VAC, Full Load.**  
 Lower:  $I_{DRAIN}$ , 100 mA / div  
 Upper:  $V_{DRAIN}$ , 100 V, 5  $\mu$ s / div

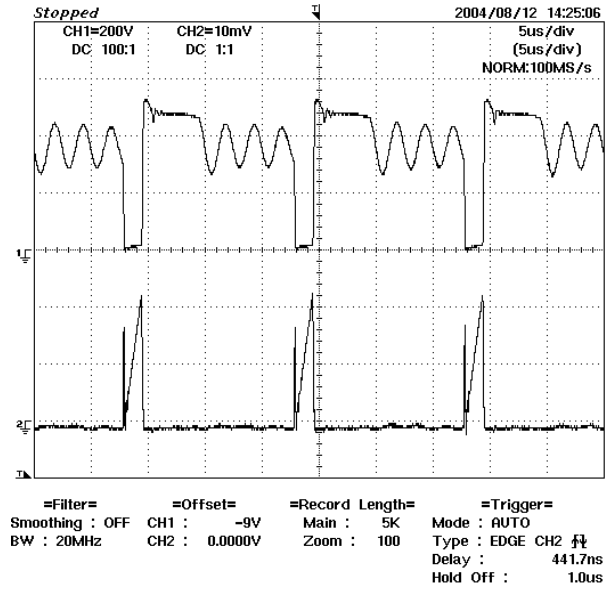


**Figure 11 - 275 VAC, Full Load**  
 Lower:  $I_{DRAIN}$ , 100 mA / div  
 Upper:  $V_{DRAIN}$ , 200 V / div

### 11.2 Output Voltage Start-up Profile

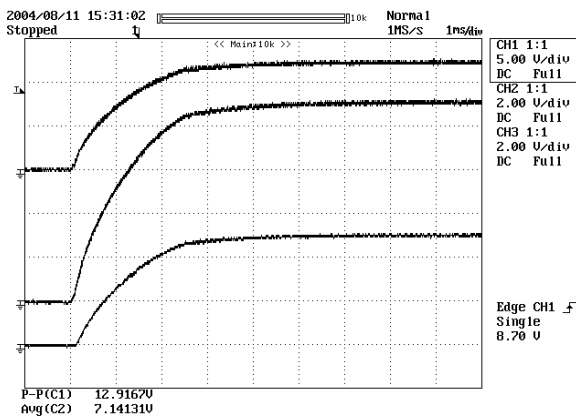

**Figure 12 - Start-up Profile, 85VAC**

CH1: 12V (5V, 1 ms / div.)  
 CH2: 9V (2V, 1 ms / div.)  
 CH3: 5V (2V, 1 ms / div.)

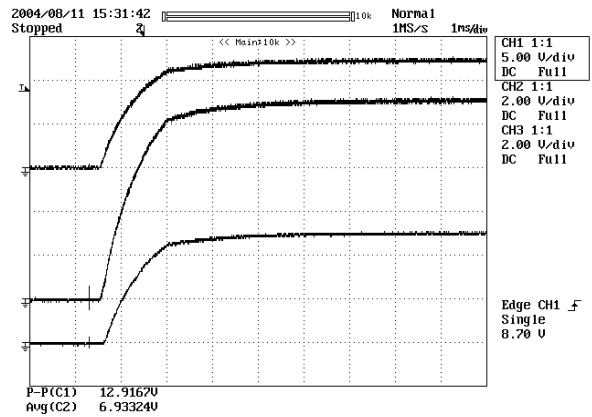


**Figure 13 - Start-up Profile, 275VAC**


CH1: 12V (5V, 1 ms / div.)  
 CH2: 9V (2V, 1 ms / div.)  
 CH3: 5V (2V, 1 ms / div.)



### 11.3 Drain Voltage and Current Start-up Profile

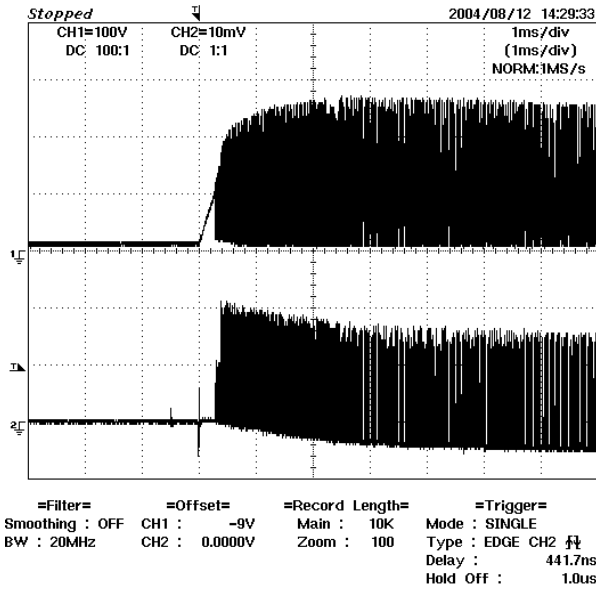


**Figure 14** - 85 VAC Input and Maximum Load.  
Lower:  $I_{DRAIN}$ , 100 mA / div.  
Upper:  $V_{DRAIN}$ , 100 V & 1 ms / div.

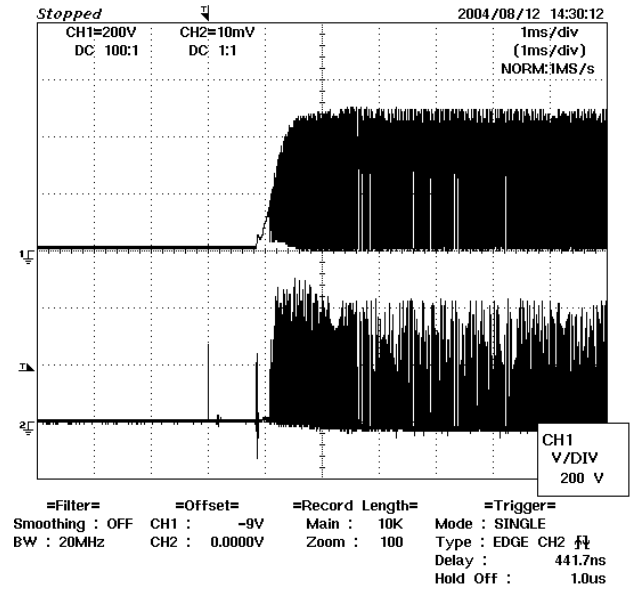

**Figure 15** - 265 VAC Input and Maximum Load.  
Lower:  $I_{DRAIN}$ , 100 mA / div.  
Upper:  $V_{DRAIN}$ , 200 V & 1 ms / div.



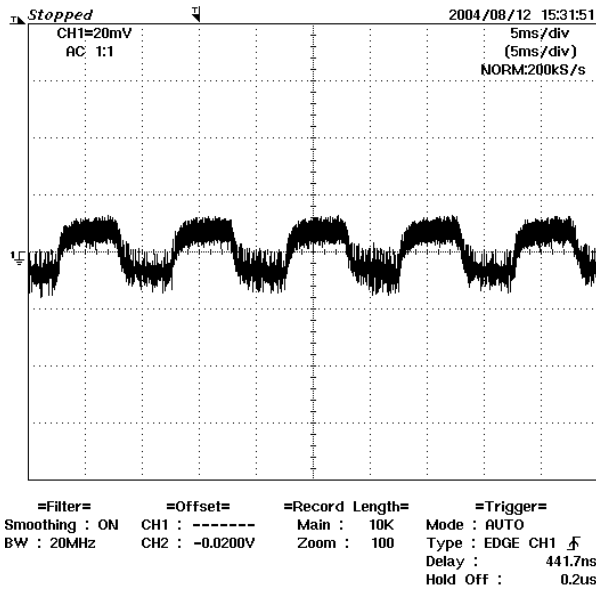

**Figure 18** – Transient Response, 230 VAC, 75-100-75% Load Step.  
5V Output Voltage  
20 mV, 5 ms / div.




## 11.5 Output Ripple Measurements


### 11.5.1 Ripple Measurement Technique

For DC output ripple measurements, a modified oscilloscope test probe must be utilized in order to reduce spurious signals due to pickup. Details of the probe modification are provided in Figure 19 and Figure 20.

The 5125BA probe adapter is affixed with two capacitors tied in parallel across the probe tip. The capacitors include one (1) 0.1  $\mu\text{F}/50\text{ V}$  ceramic type and one (1) 1.0  $\mu\text{F}/50\text{ V}$  aluminum electrolytic. **The aluminum electrolytic type capacitor is polarized, so proper polarity across DC outputs must be maintained (see below).**

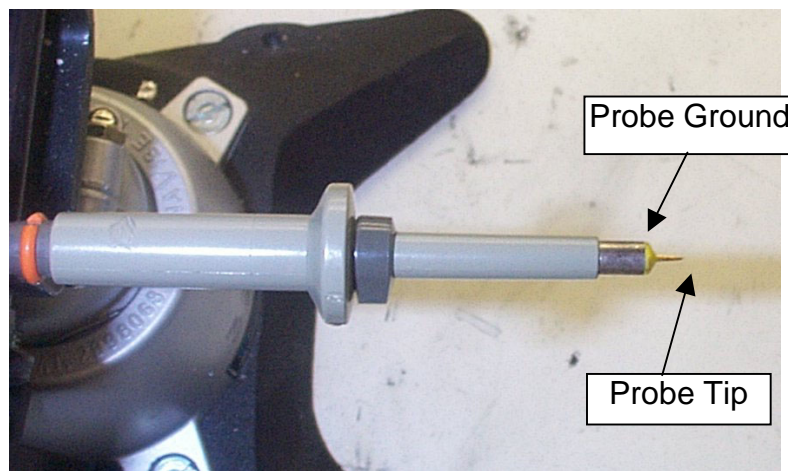


**Figure 19** - Oscilloscope Probe Prepared for Ripple Measurement. (End Cap and Ground Lead Removed)

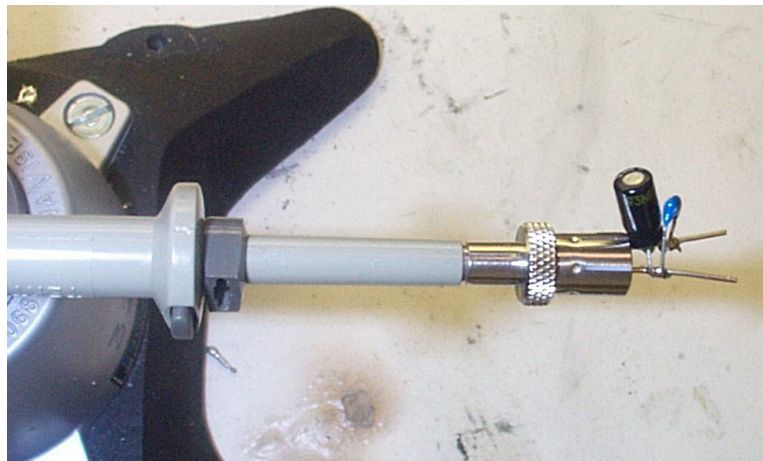


**Figure 20** - Oscilloscope Probe with Probe Master 5125BA BNC Adapter. (Modified with wires for probe ground for ripple measurement, and two parallel decoupling capacitors added)

### 11.5.2 Measurement Results

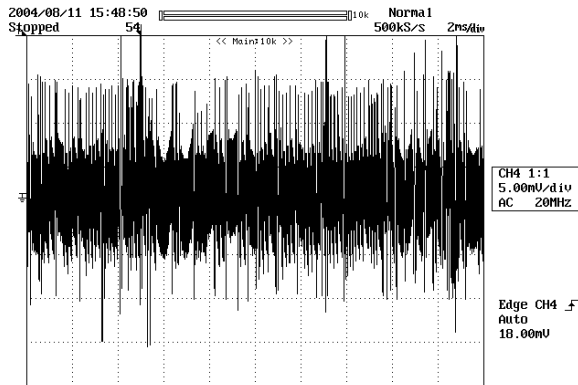


**Figure 21** – 5V Ripple, 115 VAC, Full Load.  
2 ms, 5 mV / div

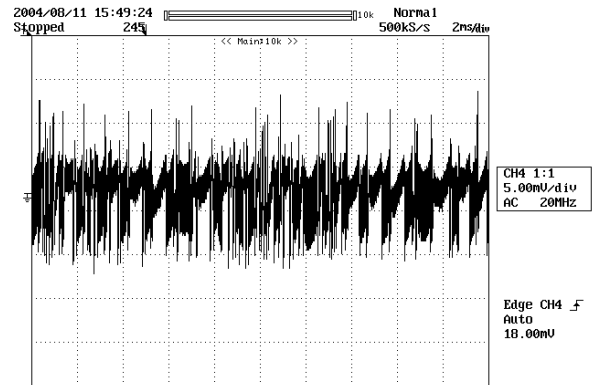


**Figure 22** - 5 V Ripple, 230 VAC, Full Load.  
2 ms, 5 mV / div



## 12 Conducted EMI

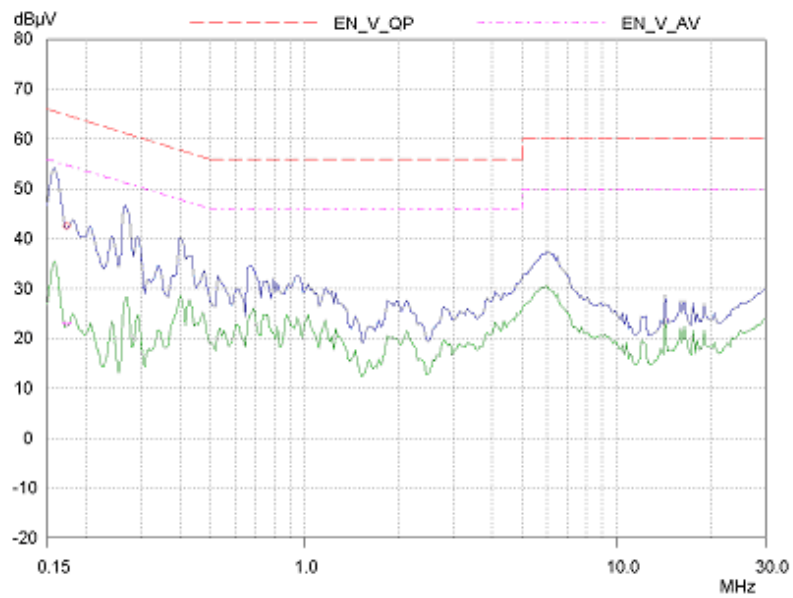


**Figure 23** - Conducted EMI, Maximum Steady State Load, 115 VAC, 50 Hz, Secondary Ground floating, and EN5022 B Limits.

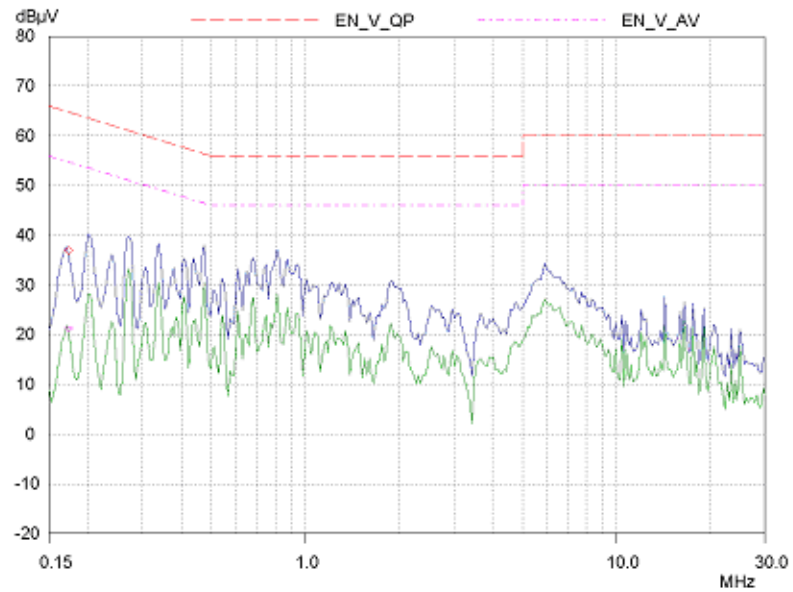


**Figure 24** - Conducted EMI, Maximum Steady State Load, 230 VAC, 50 Hz, Secondary Ground floating, and EN5022 B Limits.



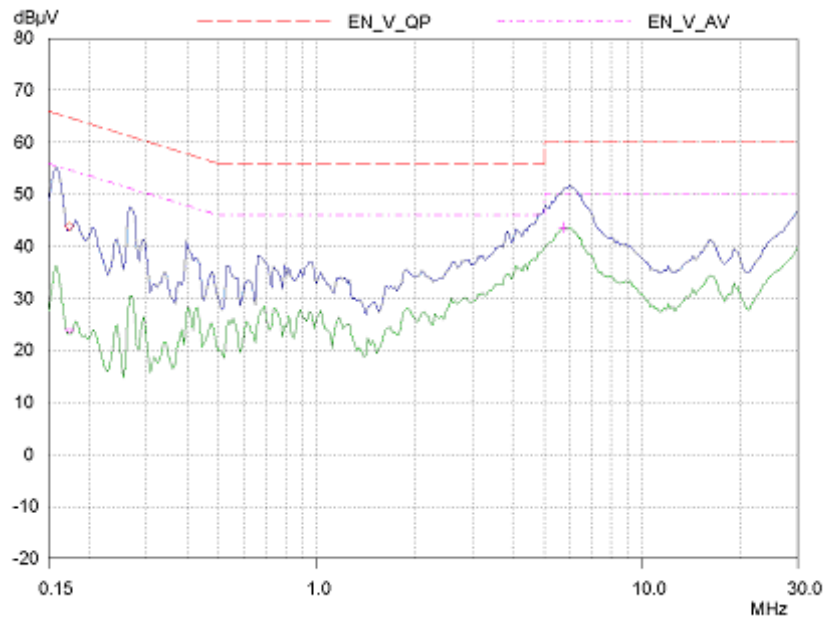

**Figure 25** - Conducted EMI, Maximum Steady State Load, 115 VAC, 50 Hz, Secondary Ground connected to Earth, and EN55022 B Limits.

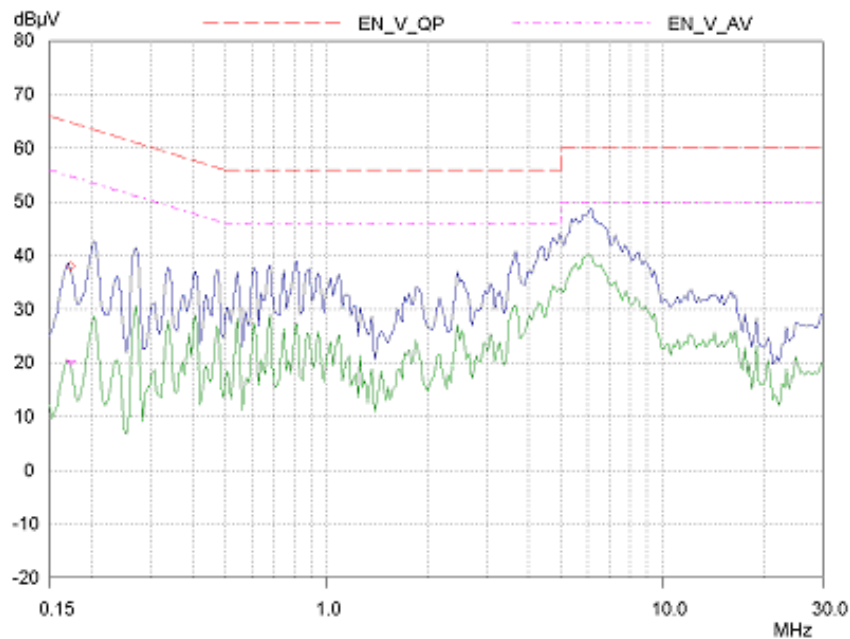

**Figure 26** - Conducted EMI, Maximum Steady State Load, 230 VAC, 50 Hz, Secondary Ground connected to Earth, and EN55022 B Limits.





### 13 Revision History

| <b>Date</b>    | <b>Author</b> | <b>Revision</b> | <b>Description &amp; changes</b> | <b>Reviewed</b> |
|----------------|---------------|-----------------|----------------------------------|-----------------|
| April 20, 2005 | HM            | 1.0             | Initial release                  | VC / AM         |



For the latest updates, visit our Web site: [www.powerint.com](http://www.powerint.com)

Power Integrations may make changes to its products at any time. Power Integrations has no liability arising from your use of any information, device or circuit described herein nor does it convey any license under its patent rights or the rights of others. POWER INTEGRATIONS MAKES NO WARRANTIES HEREIN AND SPECIFICALLY DISCLAIMS ALL WARRANTIES INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY RIGHTS.

#### PATENT INFORMATION

The products and applications illustrated herein (including circuits external to the products and transformer construction) may be covered by one or more U.S. and foreign patents or potentially by pending U.S. and foreign patent applications assigned to Power Integrations. A complete list of Power Integrations' patents may be found at [www.powerint.com](http://www.powerint.com).

The PI Logo, **TOPSwitch**, **TinySwitch**, **LinkSwitch**, and **EcoSmart** are registered trademarks of Power Integrations. **PI Expert** and **DPA-Switch** are trademarks of Power Integrations.  
© Copyright 2004, Power Integrations.

#### WORLD HEADQUARTERS

Power Integrations  
5245 Hellyer Avenue,  
San Jose, CA 95138, USA  
Main: +1-408-414-9200  
Customer Service:  
Phone: +1-408-414-9665  
Fax: +1-408-414-9765  
*e-mail:*  
[usasales@powerint.com](mailto:usasales@powerint.com)

#### AMERICAS

Power Integrations, Inc.  
4335 South Lee Street,  
Suite G,  
Buford, GA 30518, USA  
Phone: +1-678-714-6033  
Fax: +1-678-714-6012  
*e-mail:*  
[usasales@powerint.com](mailto:usasales@powerint.com)

#### CHINA (SHANGHAI)

Power Integrations  
International Holdings, Inc.  
Rm 807, Pacheer,  
Commercial Centre,  
555 Nanjing West Road,  
Shanghai, 200041, China  
Phone: +86-21-6215-5548  
Fax: +86-21-6215-2468  
*e-mail:*  
[chinasales@powerint.com](mailto:chinasales@powerint.com)

#### APPLICATIONS HOTLINE

World Wide +1-408-414-9660

#### CHINA (SHENZHEN)

Power Integrations  
International Holdings, Inc.  
Rm# 1705, Bao Hua Bldg.  
1016 Hua Qiang Bei Lu,  
Shenzhen, Guangdong,  
518031, China  
Phone: +86-755-8367-5143  
Fax: +86-755-8377-9610  
*e-mail:* [chinasales@powerint.com](mailto:chinasales@powerint.com)

#### GERMANY

Power Integrations, GmbH  
Rueckertstrasse 3,  
D-80336, Munich, Germany  
Phone: +49-895-527-3910  
Fax: +49-895-527-3920  
*e-mail:* [eurosales@powerint.com](mailto:eurosales@powerint.com)

#### INDIA (TECHNICAL SUPPORT)

Innovatech  
261/A, Ground Floor  
7th Main, 17th Cross,  
Sadashivanagar  
Bangalore, India, 560080  
Phone: +91-80-5113-8020  
Fax: +91-80-5113-8023  
*e-mail:* [indiasales@powerint.com](mailto:indiasales@powerint.com)

#### APPLICATIONS FAX

World Wide +1-408-414-9760

#### ITALY

Power Integrations s.r.l.  
Via Vittorio Veneto 12,  
Bresso, Milano,  
20091, Italy  
Phone: +39-028-928-6001  
Fax: +39-028-928-6009  
*e-mail:*  
[eurosales@powerint.com](mailto:eurosales@powerint.com)

#### JAPAN

Power Integrations, K.K.  
Keihin-Tatemono 1st Bldg.  
12-20 Shin-Yokohama,  
2-Chome,  
Kohoku-ku, Yokohama-shi,  
Kanagawa 222-0033, Japan  
Phone: +81-45-471-1021  
Fax: +81-45-471-3717  
*e-mail:*  
[japansales@powerint.com](mailto:japansales@powerint.com)

#### KOREA

Power Integrations  
International Holdings, Inc.  
8th Floor, DongSung Bldg.  
17-8 Yoido-dong,  
Youngdeungpo-gu,  
Seoul, 150-874, Korea  
Phone: +82-2-782-2840  
Fax: +82-2-782-4427  
*e-mail:*  
[koreasales@powerint.com](mailto:koreasales@powerint.com)

#### SINGAPORE (ASIA PACIFIC HEADQUARTERS)

Power Integrations, Singapore  
51 Newton Road,  
#15-08/10 Goldhill Plaza,  
Singapore, 308900  
Phone: +65-6358-2160  
Fax: +65-6358-2015  
*e-mail:*  
[singaporesales@powerint.com](mailto:singaporesales@powerint.com)

#### TAIWAN

Power Integrations  
International Holdings, Inc.  
17F-3, No. 510,  
Chung Hsiao E. Rd., Sec. 5,  
Taipei, Taiwan 110, R.O.C.  
Phone: +886-2-2727-1221  
Fax: +886-2-2727-1223  
*e-mail:*  
[taiwansales@powerint.com](mailto:taiwansales@powerint.com)

#### UK (EUROPE & AFRICA HEADQUARTERS)

1st Floor, St. James's House  
East Street  
Farnham, Surrey GU9 7TJ  
United Kingdom  
Phone: +44-1252-730-140  
Fax: +44-1252-727-689  
*e-mail:* [eurosales@powerint.com](mailto:eurosales@powerint.com)

ER or EPR template – Rev 3.4 – Single sided

